

The phoenix T5 harness is specially designed to be lightweight and fully adjustable. It is recommended for your compliance, restraint and fall arrest applications.

For further information, refer to the “Use and Maintenance Instructions” for harnesses and lanyards.

FEATURES

- Five-point adjustment
- Adjustable dorsal D-ring
- Adjustable chest strap
- Sewn sub-pelvic strap
- Inspection tag / serial number
- Accommodates tool belt up to 4 in. (102 mm) wide
- Two colors: blue shoulder straps and black leg straps

APPLICATIONS

- Restraint
- Fall arrest
- Optional work positioning

APPLICABLE STANDARDS

- CSA Z259.10-12
- ANSI Z359.1-2007
- ANSI Z359.11-2014
- ANSI A10.32-2012
- OSHA 1926
- OSHA 1910

SIZES


- One size fits most: AC032

AVAILABLE MODELS

AC032





- Quick-connect legs
- Back dorsal D-ring

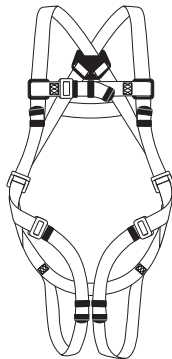

AD032



- Tongue and buckle legs
- Back dorsal D-ring

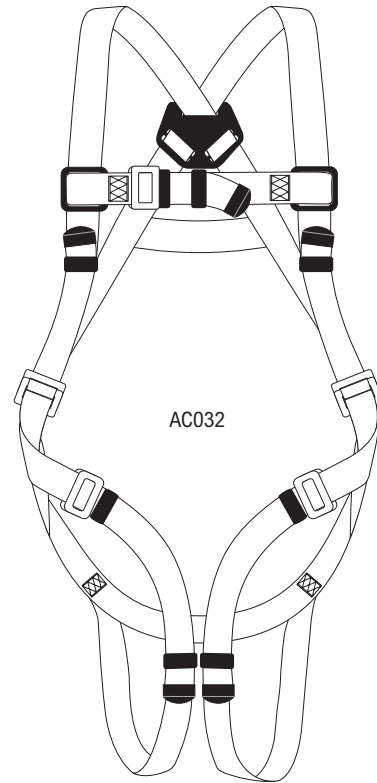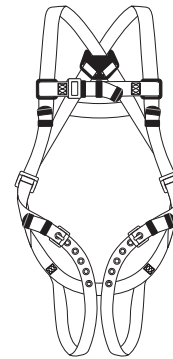

PARTS	SPECIFICATIONS
WEBBING	High tenacity polyester Width: 1¾ in. (45 mm) Thickness: ¼ in. (1.4 mm) Tensile strength: 5,700 lbs. (25.4 kN) Webbing is heat-cut to prevent fraying.
TONGUE AND BUCKLE WEBBING (LEGS)	High tenacity polyester Width: 1¾ in. (45 mm) Thickness: ¼ in. (3 mm) Tensile strength: 10,000 lbs. (44.5 kN) Webbing is heat-cut to prevent fraying.
STITCHING	Harness is lock-stitched. Thread: #138 polyester
BACK AND SIDE D-RINGS	Plating: zinc dichromate Proof-loaded 100% at 3,600 lbs. (16 kN) Tensile strength: 5,000 lbs. (22.2 kN)
QUICK CONNECT BUCKLE	Plating: zinc dichromate Tensile strength: 4,000 lbs. (17.8 kN)
TONGUE AND BUCKLE	Plating: zinc dichromate Tensile strength: 4,000 lbs. (17.8 kN)
GROMMETS	#2 spur brass
PLASTIC AND ELASTIC RETAINERS	Each webbing strap with a free end has keeper loops.
CAPACITY	386 lbs. (175 kg), one person